

**CONSTRUCTION :**

Pump body in cast iron (Jet 100)  
 Pump body in stainless steel (Jet 1000)  
 Impeller in stainless steel  
 Shaft in stainless steel; mechanical seal.

**MOTOR :**

Protection IP44, insulation class F  
 Capacitor permanently on the single-phase motors.  
 Water temperature: max 35° C.



SURFACE  
PRESSURE

**JET**


**Pump  
self  
priming**

**DN 1"**



These pumps are used for the treatment of clean water not containing abrasive particles and liquids that are not chemically aggressive to pump components. Reliable, economical and easy to use, they are suitable for domestic applications and for the automatic distribution of water from surge tanks, for watering gardens and for boosting insufficient water pressure.

Self priming pump power. Suction lift up to 9 Mt These pumps must be installed in a covered area, protected against the elements.

**JET 100 - CAST**

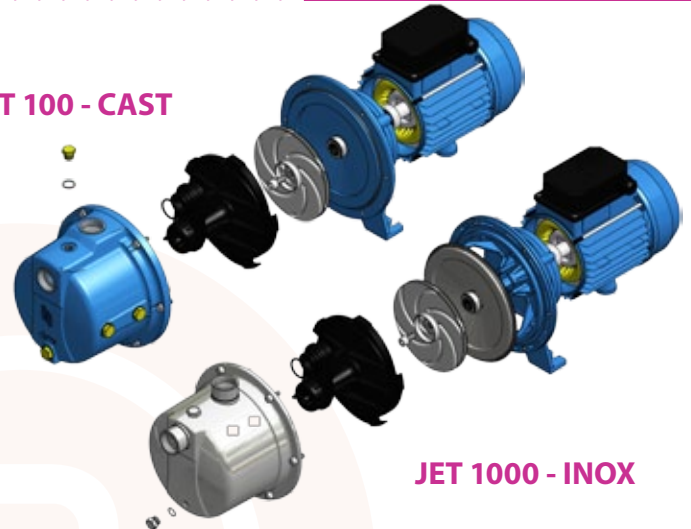

**JET 1000 - INOX**

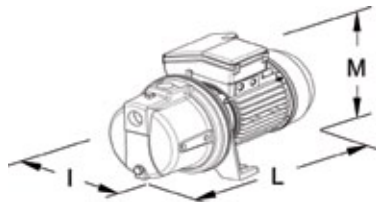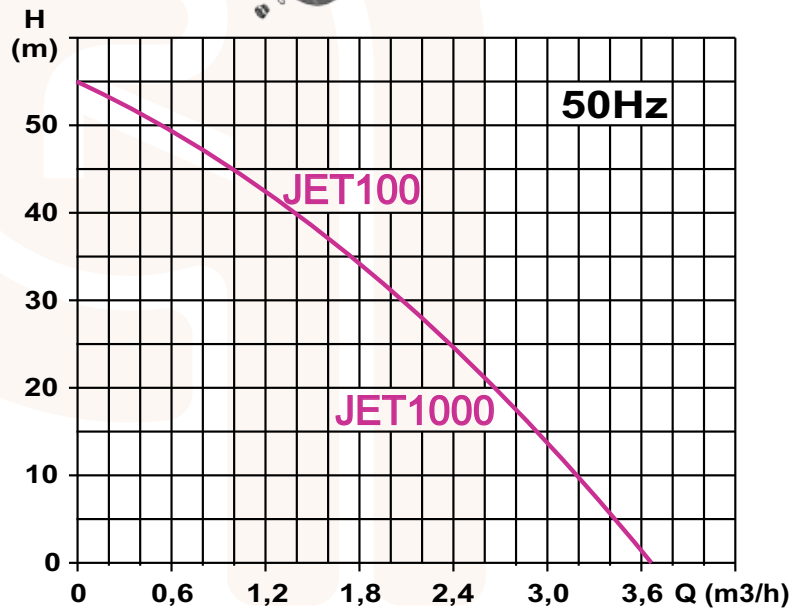

Type	Dimensions (mm)			Weight Kg
	I	L	M	
<b>JET 100</b>	200	415	233	15
<b>JET 1000 Inox</b>	200	400	233	12

Type	Tension V	Power		Motor		Connection DN	H (max) m	Debit (max) m³/h	Code
		kW	CV	A	µF				
<b>JET 100</b>	<b>1 x 230</b>	0,8	1,1	4,60	20	1"	55	3,6	<b>01010996</b>
<b>JET 1000 Inox</b>		0,8	1,1	4,60	20	1"	55	3,6	<b>01010997</b>

<b>JET 100</b>	<b>3 x 400</b>	0,8	1,1	1,9	-	1"	55	3,6	<b>01010998</b>
<b>JET 1000 Inox</b>		0,8	1,1	1,9	-	1"	55	3,6	<b>01010999</b>